


BWR Rotary Cable Gland

- Size** : OO to O8
- Function** : Providing mechanical cable retention & electrical continuity via armoured wire termination and protect armour wire in dry indoor area for SWA cable.
- Features** : Easy to Install, Rotary Cone, Nickel Plated
- Ingress Protection** : IP2X
- Thread** : Metric
- Operating Temp.** : -60°C to +200°C
- Cable Type** : Steel Wire Armour (SWA) Cable
- Material** : Nickel Plated Brass CW614N
- Accessories** : Shroud, Earth Tag

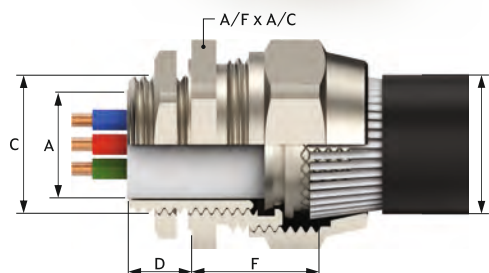

GLAND SELECTION CHART

Gland Size	Thread "C"	Thread Length "D"	Cable Diameter		Protrusion Length "F"	A/F	A/C
			Min. "A"	Max. "B"			
OO	M20x1.5	16.00	12.00	16.00	28.50	22.00	24.00
O1	M20x1.5	10.00	14.00	21.20	30.00	27.00	29.50
O2	M25x1.5	10.00	20.20	27.00	32.00	35.00	38.00
O3	M32x1.5	10.00	26.20	33.40	37.50	42.00	45.00
O4	M40x1.5	15.00	32.50	39.80	42.25	52.00	58.00
O5	M50x1.5	15.00	44.40	52.50	49.00	63.00	70.00
O6	M63x1.5	15.00	55.30	65.50	49.50	80.00	85.00
O7	M75x1.5	15.00	69.50	79.00	58.70	95.00	100.00
O8	M80x2	15.00	74.00	84.00	38.00	95.00	100.00

PRODUCT CODE FOR ORDERING PURPOSE

Size	Type	Material	Thread Type	Shroud Type	Accessories
OO	BWR	Brass Nickel Plated - 3	Standard Metric-11	PVC Shroud-PS LSF Shroud-LS	Earth Tag-9

ORDERING INFORMATION

Code : OOBWR311PS
BWR00 Nickel Plated Cable Gland.

Marking on Gland : CABTEK BS 6121 PT-1 BWR-OO

OO=Gland Size, BWR=Gland Code,
3= With Nickel Plated Brass Material,
11=With Standard Metric Thread, PS= With PVC Shroud.