
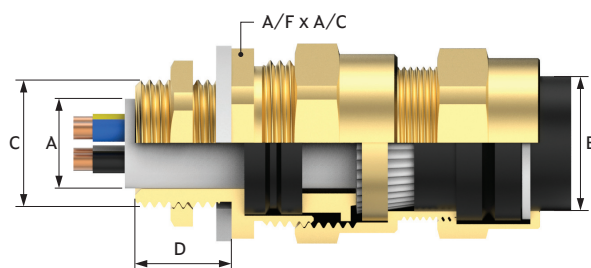


Double Compression Flameproof Cable Gland

- Size** : 16mm to 88mm & 3/8" to 4"
- Standard** : EN EC 60079-0: 2018, EN / IEC 60079-1: 2014 & EN / IEC 60079-31: 2014/2013
- Application** : For indoor & outdoor hazardous area use with all types of SWA/STA cable providing flameproof seal on cable inner sheath and environmental seal on cable outer sheaths. Also provides mechanical retention & electrical continuity via armour wire termination.
- Ingress Protection** : IP67
- CIMFR Certificate No.** : CMF 19 INEX 0033
- PESO Certificate No.** : P568411/1
- Code of Protection** : Ex d IIB/IIC GB
- Material** : Brass CW614N, Nickel Plated Brass, SS316L
- Thread** : Metric, NPT, ET
- Operating Temp.** : -20°C to +110°C
- Cable Type** : Single Wire Armour (SWA) Cable, Steel Tape Armour (STA)
- Features** : Compression Seal and Armored Ring
- Seal Material** : Neoprene Seal and Nylon Washer
- Standard Accessories** : IP Washer (Thread Seal)
- Optional Accessories** : Shroud, Lock Nut, Earth Tag, Serrated Washer, Ingress Disc

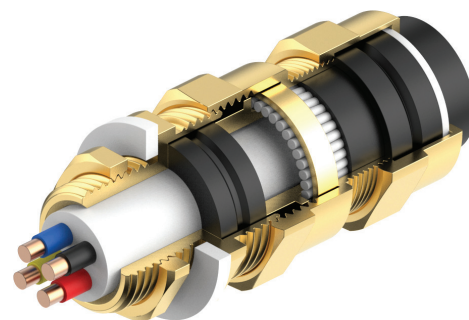

GLAND SELECTION CHART

Size	Indian Gland Equivalent Size	Entry Thread "C"			Optional Thread		Thread Length "D"	Cable Dia. "A"		Cable Dia. "B"		Armour Wire Dia.	A/F	A/C
		Metric	ET	NPT	Metric	NPT		Min.	Max.	Min.	Max.			
16	O1SS	M16	5/8"	3/8"	M20	3/4"	15.00	4.00	8.60	6.60	13.10	0.80-1.40	20.00	22.00
20S	O1S	M20	3/4"	1/2"	M25	1"	15.00	5.50	11.70	10.20	15.90	0.80-1.40	22.00	24.20
20	O1, O2	M20	3/4"	1/2"	M25	1"	15.00	6.50	13.90	15.00	21.00	0.80-1.40	27.00	29.20
25	O3, O4	M25	1"	3/4"	M32	1 1/4"	15.00	10.00	19.90	19.90	26.20	0.80-1.40	35.00	38.00
32	O5, O6	M32	1 1/4"	1"	M40	1 1/2"	15.00	14.00	26.20	26.00	33.00	0.80-1.40	41.00	45.00
40	O7, O8	M40	1 1/2"	1 1/4"	M50	2"	15.00	23.60	32.10	31.50	40.00	0.80-1.40	47.50	52.00
50S	O9	M50	2"	1 1/2"	M63	2 1/2"	15.00	31.50	38.20	37.00	46.00	0.80-1.40	56.50	61.50
50	O10	M50	2"	2"	M63	2 1/2"	15.00	34.00	44.00	45.00	52.00	0.80-1.40	60.50	65.50
63S	O11S, 11	M63	2 1/2"	2"	M75	3"	15.00	41.00	50.00	50.00	59.00	0.80-1.40	68.00	73.00
63	O12	M63	2 1/2"	2 1/2"	M75	3"	15.00	46.50	56.00	59.00	65.00	0.80-1.40	75.00	80.00
75S	O13A	M75	3"	3"	M88	3 1/2"	15.00	53.00	62.00	64.00	72.00	0.80-1.40	83.50	89.00
75	O13	M75	3"	3 1/2"	M88	3 1/2"	15.00	59.00	68.00	70.00	78.40	0.80-1.40	89.00	93.00
88	O14	M90	3 1/2"	4"	M100	4"	15.00	69.00	79.00	78.00	86.00	0.80-1.40	100.00	110.00

PRODUCT CODE FOR ORDERING PURPOSE

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s	CDCF	Brass-1	Standard Metric-11	PVC Shroud-PS	Lock Nut-5
		Stainless Steel-2	Standard NPT-12	LSF Shroud-LS	IP Washer-6
		Nickel Plated-3	Standard ET-13	LSOH Shroud-SL	Serrated Washer-7
			Optional Metric-16	PCP Shroud-PC	Ingress Disc-8
			Optional ET-18		Earth Tag-9

ORDERING INFORMATION

Code: 20sCDCF311PS569
CDCF-20s Nickel Plated Cable Gland Kit

20s=Gland Size, CDCF=Gland Type, 3= With Nickel Plated Material, 11=With Standard Metric Thread, PS= With PVC Shroud, 5=With Lock Nut, 6=With IP Washer, 9=With Earthing Tag