


**CXe Ex e Cable Gland**

- Size** : 16mm to 90mm & 3/8" to 3 1/2"
- Standard** : EN IEC 60079-0:2018, EN IEC 60079-7:2015+A1:2018, EN/IEC 60079-31:2014/2013
- Function** : Providing environmental seal on the cable outer sheath. Also provides mechanical cable retention & electrical continuity via armoured wire termination in indoor and outdoor hazardous area with all types of STA/ASA cable. Designed to prevent cold flow.
- IECEX Certificate No.** : IECEx ITS 16.0041X
- ATEX Certificate No.** : ETL22ATEX0109X
- EAC Certificate No.** : RU C-IN.Ж58.B.O3310/22
- PESO Certificate No.** : P568411/1
- Code of Protection** : Ex eb IIC Gb, Ex tb IIIC Db
- Ingress Protection** : IP67 as per EN 60529.
- Operating Temp.** : -60°C to +125°C
- Material** : Brass CW614N/CW617N/EN12165, Stainless Steel 316L
- Thread** : Metric, NPT, BSP, ET and PG
- Cable Type** : Aluminium Strip Armour ( ASA)
- Seal Material** : LSOH Silicone Seal & Nylon Washer
- Features** : Outer Compression Seal and Universal Armoured Ring
- Standard Accessories** : IP Washer (Thread Seal )
- Optional Accessories** : Shroud, Lock Nut, Earth Tag, Serrated Washer, Ingress Disc, Deluge Seal

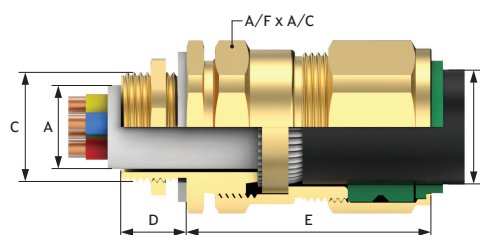

**GLAND SELECTION CHART**

Size	Standard Thread Size "C"				Optional Thread		Thread Length "D"	Cable Dia. "A" Max.	Cable Dia. "B"		Strip Armour	Protrusion Length "E"	A/F	A/C
	Metric	NPT/BSP	ET	PG	Metric	NPT/BSP			Min.	Max.				
16	16	3/8"	5/8"	PG9	-	-	15.00	8.60	6.10	13.10	0.3-1.0	46.00	24.00	26.20
20s16	20	1/2"	3/4"	PG11	25	3/4"	15.00	8.60	6.10	13.10	0.3-1.0	46.00	24.00	26.20
20S	20	1/2"	3/4"	PG13.5	25	3/4"	15.00	11.70	9.50	15.90	0.3-1.0	46.00	24.00	26.20
20	20	1/2"	3/4"	PG16	25	3/4"	15.00	13.90	12.50	20.90	0.4-1.0	48.75	30.00	33.00
25s	25	3/4"	1"	PG21	32	1"	15.00	15.40	14.00	22.00	0.4-1.2	55.75	36.00	39.20
25	25	3/4"	1"	PG21	32	1"	15.00	19.90	19.90	26.20	0.4-1.2	55.75	36.00	39.20
32	32	1"	1 1/4"	PG29	40	1 1/4"	15.00	23.70	23.70	33.90	0.4-1.2	56.00	46.00	50.60
40	40	1 1/4"	1 1/2"	PG36	50	1 1/2"	15.00	32.10	27.90	40.40	0.4-1.6	59.50	55.00	60.00
50S	50	1 1/2"	2"	PG36	63	2"	15.00	38.20	35.20	46.70	0.4-1.6	58.25	60.00	65.00
50	50	2"	2"	PG42	63	2 1/2"	15.00	44.00	40.40	53.00	0.6-1.6	62.00	70.00	75.00
63S	63	2"	2 1/2"	PG48	75	2 1/2"	15.00	50.00	45.60	59.40	0.6-1.6	62.00	75.00	80.00
63	63	2 1/2"	2 1/2"	-	75	3"	15.00	56.00	54.60	65.80	0.6-1.6	64.00	80.00	85.00
75S	75	2 1/2"	3"	-	90	3"	15.00	62.00	59.00	72.00	0.6-1.6	69.00	90.00	95.00
75	75	3"	3"	-	90	3 1/2"	15.00	68.00	66.70	78.40	0.6-1.6	74.00	100.00	110.00
90	90	3 1/2"	3 1/2"	-	100	4"	18.00	79.00	76.20	90.30	0.8-1.6	89.00	112.00	122.00

**PRODUCT CODE FOR ORDERING PURPOSE**

Size	Type	Material	Thread Type	Shroud Type	Accessories	
20s16	CXe	Brass-1	Standard Metric-11	PVC Shroud-PS	Lock Nut-5	
		Stainless Steel-2	Standard NPT-12	LSF Shroud-LS	IP Washer-6	
		Nickel Plated-3	ET Thread-13	LSOH Shroud-SL	Serrated Washer-7	
			PG Thread-14	PCP Shroud-PC	Ingress Disc-8	
			BSP Thread-15		Earth Tag-9	
				Optional Metric-16		
				Optional NPT-17		
				Optional BSP-20		

**ORDERING INFORMATION**

**Code:** 20s16CXe311PS569  
CXe-20s16 Nickel Plated Cable Gland Kit

20s16=Gland Size, CXe=Gland Type, 3= With Nickel Plated Material, 11=With Standard Metric Thread, PS= With PVC Shroud, 5=With Lock Nut, 6=With IP Washer, 9=With Earthing Tag