
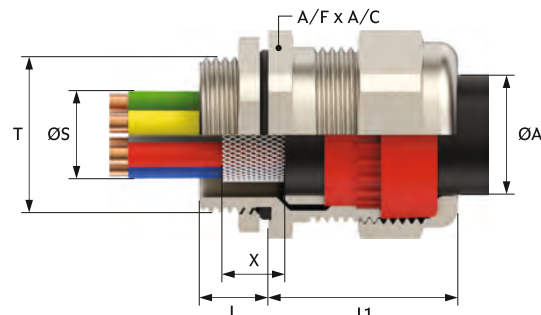


### IP68 Cable Gland Short Thread

<b>Size</b>	: 8mm to 63mm
<b>Function</b>	: Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
<b>Ingress Protection</b>	: IP68 as per EN 60529.
<b>Operating Temp.</b>	: -35°C to +120°C
<b>Material</b>	: Brass Nickel Plated
<b>Thread</b>	: Short Type Metric
<b>Features</b>	: Outer Displacement Seal
<b>Seal Material</b>	: Silicone
<b>O-Ring Material</b>	: NBR

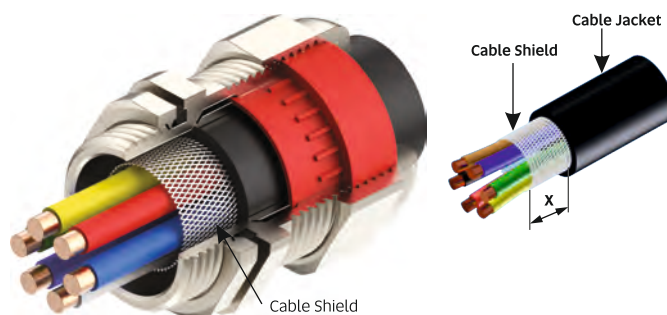

### GLAND SELECTION CHART

Item Code	Size T	Cable Dia. "A"		Cable Shield ØS	Shield Length X	A/F	A/C	Thread Length L	Uncom-pressed Length-L1	Torque (Nm)	Pack Pcs
		Min.	Max.								
CSIP68-8-35	M8x1.25	2.50	3.50	-	-	11.00	-	5.00	15.00	2.00	50.00
CSIP68-8-40	M8x1.25	3.00	4.00	-	-	11.00	-	5.00	15.00	2.00	50.00
CSIP68-10-40	M10x1.5	3.00	4.00	-	-	13.00	-	5.00	16.00	3.00	50.00
CSIP68-10-60	M10x1.5	4.00	6.00	-	-	13.00	-	5.00	16.00	3.00	50.00
CSIP68-12-60	M12x1.5	4.50	6.00	-	-	15.00	-	5.00	20.00	3.00	50.00
CSIP68-12-75	M12x1.5	6.00	7.50	-	-	15.00	-	5.00	20.00	3.00	50.00
CSIP68-16-80	M16x1.5	6.00	8.00	5.1-6.0	12.00	18.00	-	5.00	23.00	4-8	50.00
CSIP68-16-10	M16x1.5	8.00	10.00	6.1-7.0	12.00	18.00	-	5.00	25.00	4-8	50.00
CSIP68-20-11	M20x1.5	8.00	11.00	6.1-7.0	12.00	24.00	26.20	6.00	25.00	6-9	50.00
CSIP68-20-14	M20x1.5	11.00	14.00	8.1-9.0	12.00	24.00	26.20	6.00	27.00	6-9	50.00
CSIP68-25-16	M25x1.5	13.00	16.00	2.1-13.0	12.00	30.00	33.00	7.00	30.00	12-18	25.00
CSIP68-25-19	M25x1.5	16.00	19.00	14.1-15.0	12.00	30.00	33.00	7.00	33.00	12-18	25.00
CSIP68-32-21	M32x1.5	18.00	21.00	6.5-18.0	14.00	36.00	39.20	8.00	32.00	14-20	25.00
CSIP68-32-25	M32x1.5	21.00	25.00	18.1-19.5	14.00	36.00	39.20	8.00	32.00	14-20	25.00
CSIP68-40-285	M40x1.5	24.00	28.50	23.1-25.0	14.00	46.00	50.60	8.00	34.00	20-25	10.00
CSIP68-40-32	M40x1.5	28.50	32.00	25.1-27.0	14.00	46.00	50.60	8.00	34.00	20-25	10.00
CSIP68-50-37	M50x1.5	33.00	37.00	29.1-31.0	14.00	55.00	60.00	9.00	36.00	20-25	10.00
CSIP68-50-41	M50x1.5	37.00	41.00	35.1-37.0	14.00	55.00	60.00	9.00	36.00	20-25	10.00
CSIP68-63-46	M63x1.5	40.00	46.00	37.1-39.0	14.00	70.00	75.00	10.00	39.00	20-25	5.00
CSIP68-63-50	M63x1.5	46.00	50.00	41.1-43.0	14.00	70.00	75.00	10.00	39.00	20-25	5.00

All Dimensions are in mm

### ORDERING INFORMATION

**Item Code** : CSIP68-8-35  
**Item Name** : M8 IP68 Cable Gland for Cable OD 2.5-3.5mm  
 For NBR Seal, Put a suffix " N " to the Item Code

- Gland will be supplied with Brass Nickel Plated Material
- Assembled with Lock Nut and O-Ring
- Also available as per customer requirement