


CWe Ex e Cable Gland

- Size** : 16mm to 90mm & 3/8" to 3 1/2"
- Standard** : EN IEC 60079-0:2018, EN IEC 60079-7:2015+A1:2018, EN/IEC 60079-31:2014/2013
- Function** : Providing environmental seal on the cable outer sheath. Also provides mechanical cable retention & electrical continuity via armoured wire termination in indoor and outdoor hazardous area with all types of SWA cable. Designed to prevent cold flow.
- IECEX Certificate No.** : IECEX ITS 16.0041X
- ATEX Certificate No.** : ETL22ATEX0109X
- EAC Certificate No.** : RU C-IN.X58.B.O3310/22
- PESO Certificate No.** : P568411/1
- Code of Protection** : Ex eb IIC Gb, Ex tb IIIC Db
- Ingress Protection** : IP67 as per EN 60529.
- Operating Temp.** : -60°C to +125°C
- Material** : Brass CW614N/CW617N/EN12165, Stainless Steel 316L
- Thread** : Metric, NPT, BSP, ET and PG
- Cable Type** : Steel Wire Armoured (SWA) Cable, Aluminium Wire Armour (AWA)
- Seal Material** : LSOH Silicone Seal & Nylon Washer
- Features** : Outer Compression Seal and Universal Armoured Ring
- Standard Accessories** : IP Washer (Thread Seal)
- Optional Accessories** : Shroud, Lock Nut, Earth Tag, Serrated Washer, Ingress Disc, Deluge Seal

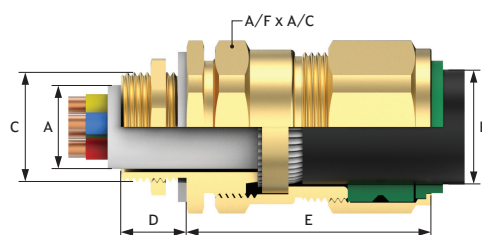

GLAND SELECTION CHART

Size	Standard Thread Size "C"				Optional Thread		Thread Length "D"	Cable Dia. "A" Max.	Cable Dia. "B"		Armour Wire Dia	Protrusion Length "E"	A/F	A/C
	Metric	NPT/BSP	ET	PG	Metric	NPT/BSP			Min.	Max.				
16	16	3/8"	5/8"	PG9	-	-	15.00	8.60	6.10	13.10	0.9	46.00	24.00	26.20
20s16	20	1/2"	3/4"	PG11	25	3/4"	15.00	8.60	6.10	13.10	0.9	46.00	24.00	26.20
20S	20	1/2"	3/4"	PG13.5	25	3/4"	15.00	11.70	9.50	15.90	0.9-1.25	46.00	24.00	26.20
20	20	1/2"	3/4"	PG16	25	3/4"	15.00	13.90	12.50	20.90	0.9-1.25	48.75	30.00	33.00
25s	25	3/4"	1"	PG21	32	1"	15.00	15.40	14.00	22.00	1.25-1.6	55.75	36.00	39.20
25	25	3/4"	1"	PG21	32	1"	15.00	19.90	19.90	26.20	1.25-1.6	55.75	36.00	39.20
32	32	1"	1 1/4"	PG29	40	1 1/4"	15.00	23.70	23.70	33.90	1.6-2.0	56.00	46.00	50.60
40	40	1 1/4"	1 1/2"	PG36	50	1 1/2"	15.00	32.10	27.90	40.40	1.6-2.0	59.50	55.00	60.00
50S	50	1 1/2"	2"	PG36	63	2"	15.00	38.20	35.20	46.70	2.0-2.5	58.25	60.00	65.00
50	50	2"	2"	PG42	63	2 1/2"	15.00	44.00	40.40	53.00	2.0-2.5	62.00	70.00	75.00
63S	63	2"	2 1/2"	PG48	75	2 1/2"	15.00	50.00	45.60	59.40	2.0-2.5	62.00	75.00	80.00
63	63	2 1/2"	2 1/2"	-	75	3"	15.00	56.00	54.60	65.80	2.0-2.5	64.00	80.00	85.00
75S	75	2 1/2"	3"	-	90	3"	15.00	62.00	59.00	72.00	2.0-2.5	69.00	90.00	95.00
75	75	3"	3"	-	90	3 1/2"	15.00	68.00	66.70	78.40	2.0-2.5	74.00	100.00	110.00
90	90	3 1/2"	3 1/2"	-	100	4"	18.00	79.00	76.20	90.30	3.0-3.5	89.00	112.00	122.00

PRODUCT CODE FOR ORDERING PURPOSE

Size	Type	Material	Thread Type	Shroud Type	Accessories
20s16	CWe	Brass-1	Standard Metric-11	PVC Shroud-PS	Lock Nut-5
		Stainless Steel-2	Standard NPT-12	LSF Shroud-LS	IP Washer-6
		Nickel Plated-3	ET Thread-13	LSOH Shroud-SL	Serrated Washer-7
			PG Thread-14	PCP Shroud-PC	Ingress Disc-8
		BSP Thread-15		Earth Tag-9	
		Optional Metric-16			
Optional NPT-17					
Optional BSP-20					

ORDERING INFORMATION

Code: 20s16CWe311PS569
CWe-20s16 Nickel Plated Cable Gland Kit

20s16=Gland Size, CWe=Gland Type, 3= With Nickle Plated Material, 11=With Standard Metric Thread, PS= With PVC Shroud, 5=With Lock Nut, 6=With IP Washer, 9=With Earthing Tag